


MAXFLO M-25 & M-25WA

The **MAXFLO** unit has been engineered using high quality products housed in a 16 Gauge steel cabinet, finished in dark blue chemical resistant polyurethane paint for long unit life. Each unit is a self-contained system and can be used individually for smaller operations or in groups for larger areas.



MAXFLO M-25 provides efficient removal of irritating contaminants such as smoke, oil mist, chemical fumes, or dust. **MAXFLO M-25** uses efficient filters which have been constructed using micro-glass fibers. The filters are able to separate sub-micron particles from the air passing through the unit and hold them in high quantities. Four inch pleated pre-filters catch the larger particles and extend the bag filter's life. A wide range of different filters are available for different applications. Filter efficiencies are rate by ASHRE standards 52-76. The **M-25** also comes with the option of adding an additional Wrap-A-Round Prefilter, that increases the life of the pleated prefilter and main bag filter. The unit shown above is shown with the optional filter change gauge.

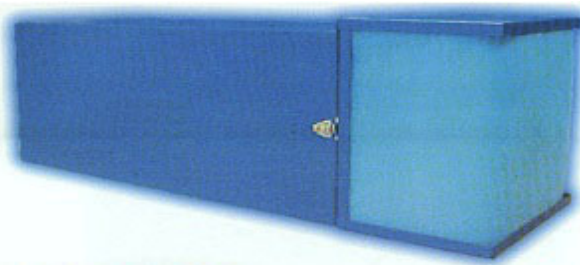

Diversified Air Systems, Inc., has been in the air cleaning business for over 31 years and has provided air cleaning systems in thousands of industrial plants throughout the entire United States, Canada, South America, Asia etc. We offer a three year warranty on all parts (excluding filters).

M-25WA

APPLICATIONS	FEATURES	BENEFITS
<ul style="list-style-type: none"> • Welding Smoke/Fumes • Grinding Dust • Bondo Dust • Diesel Smoke • Oil Mist • Printing Powder • Plastic Dust • Other Smoke/Dust 	<ul style="list-style-type: none"> • Disposable Filters • Low Operating Cost • Self-Contained • Four Way Louvers • 16 Gauge Cabinet • T-Shape Model • Option Pressure 	<ul style="list-style-type: none"> • Low Maintenance • Economical • Easy To Install • Easy To Direct Air-flow • Durability • Maximum Effectiveness • Filter Change

MAXFLO M-25 & M-25WA

INSTALLATION:

Installation of your unit is usually quite simple. The unit is designed for chain hanging, rod mounting, or a wall bracket installation. The location of the units and the design of the airflow system can best be handled by your sales engineer after an inspection of your particular area. Wrap-A-Round is a possible option and is designed to extend the life of the pleated prefilter and main bag filter.

	M-25
Dimensions	24"H 24"D 59"W
Weight	160 lbs
Wrap-A-Round Added	24"H 24"D 77"W
Weight	200 lbs
Input Power	115 Volts
Power Consumption	1092 Watts
Maximum Capacity	2500 CFM
Motor	3/4 H.P.
Speed	Two Speed
Power Cord	12 Foot
Construction	16 Gauge
Paint	Dark blue chemical resistant polyurethane

Options M-25

- Pressure Gauge: Indicates when to change filter
- 3/4 H.P. 230 Volts Single Phase with Junction Box
- Washable Aluminum Mesh Prefilter
- Wrap-A-Round Prefilter
- Mounted eye-bolts
- Silencer: reduces sound by 6 decibels

Call Today: 502-267-0333
Email: info@diversair.com