DIVERSIFIED AIR SYSTEMS, INC.

INFLO-BOB

Portable Blow Off Booth

- Ships fully assembled, 48" wide x 24" deep work surface
- Plug and play unit, total self-contained downdraft booth
- LED light mounted out of air stream



- Ventless, recirculates clean air, which eliminates the need for expensive exhaust
- Motor and electrical mounted out of air stream with plastic blower wheel
- High efficiency media filters with refillable adsorption modules

Superior technology generating substantial operating savings

MAXFLO PORTABLE BLOW OFF BOOTH

Diversified Air Systems, Inc. now offers an easy to use portable fume/paint booth. The MAXFLO-BOB is a totally self-contained portable filtration unit. Standard filtration consist of multiple pass polyester pre-filters followed by a MERV 14 (95% at 1 micron) box filter with final refillable charcoal module. Separate access door allows for easy access to filters. The motor is mounted out of the air stream with direct drive non-sparking blower wheel. LED light, on/off switch and wiring are all located out of the airstream. Just roll the unit to your job, plug it in and turn it on.

OUTSTANDING STANDARD MAXFLO BLOW OFF BOOTH FEATURES




TYPICAL APPLICATIONS FOR THE MAXFLO PORTABLE BLOW OFF BOOTH

Spray Painting
Solvent Fumes/Mist
Dust
Fumes
Laboratories
Powders
Blow Off Station, etc...

Made in USA 1 YEAR LIMITED WARRANTY

CALL TODAY: 800-264-8958

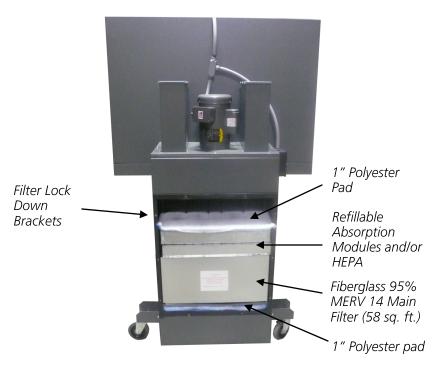



SPECIFICATIONS

Dimensions: 48" W x 39" D x 74" H

Working Table Height: 41"

Working Surface: 48" Width x 24" Depth

Electrical: 1.5 HP Motor, 120/1/60

Direct Drive Motor with Plastic Blower Wheel

Motor Mounted Out of Airstream

CFM: 1900 CFM Nominal

Downdraft Velocity: 250 FPM Nominal

Weight: 610 lbs.

Max Table Load: 300 PSF Noise: 73 DBA Nominal

Construction: 14 Gauge Cabinet

Color: Powder Coated Gray

OPTIONAL FEATURES

- Smaller 30" x 24" Enclosure
- **Exhaust Dampers**
- Variable Frequency Drives
- **Custom Size Booths**
- **HEPA Filtration**
- 2" Table Top Polyester Pads
- Modular 1' Square Table Extension
- **Aluminum Mesh Filters**
- LED Light

MAXFLO-FB STANDARD FILTER ARRANGEMENT

- (1) 1" Polyester Pad Prefilter
- (1) 95% @ 1 Micron (MERV 14) Fiberglass Box Filter, 58 sq. ft.
- (2) Adsorption Modules, 26 lbs. each Refillable, 6" Total Bed Depth, 100% Fill, 52 lbs. Activated Carbon Included
- (1) 1" Polyester Pad After Filter

Note: Specifications listed above may be modified to suit application. contact D.A.S. or representative for information.

Diversified Air Systems, Inc.

10801 Electron Drive, Louisville, Kentucky 40299

Toll free: (800) 264-8958

Tel.: (502) 267-0333 • Fax: (502) 267-4241

Website: www.diversair.com • email: info@diversair.com